



# Installation

Model specific instructions

These instructions are a model specific add-on to the general BoosterPlug installation instructions.

The general BoosterPlug installation instructions can be found in the "Downloads" section on the BoosterPlug.com website:

<http://www.boosterplug.com/shop/cms-downloads.html>

For Harley Davidson Touring models:

• FLHX	Street Glide
• FLHXS	Street Glide Special
• FLTR	Road Glide
• FLTRX	Road Glide Custom
• FLTRU	Road Glide Ultra
• FLTRXS	Road Glide Special
• FLHR	Road King
• FLHRS	Road King Custom
• FLHRC	Road King Classic
• FLHT	Electra Glide Standard
• FLHTK	Electra Glide Ultra Limited
• FLHTKL	Electra Glide Ultra Limited Low
• FLHTC	Electra Glide Classic
• FLHTCU	Electra Glide Ultra Classic
• FLHTCUL	Electra Glide Ultra Classic Low


## Installation Tips

- Install the BoosterPlug module as per the general installation papers.
- The picture below should help you locate the AIT sensor where the BoosterPlug is installed.
  - The AIT sensor is found in the throttle valve body between the cylinder heads.
  - Remove the air filter assembly to get access to the AIT sensor.
- You have several choices for the BoosterPlug sensor location, but our favorite place is near the steering head or under the head light.
  - Just stick to the simple rules in the general installation instructions for placing the external sensor, and you'll be fine.

## Pictures

For:

- All 2007 models.

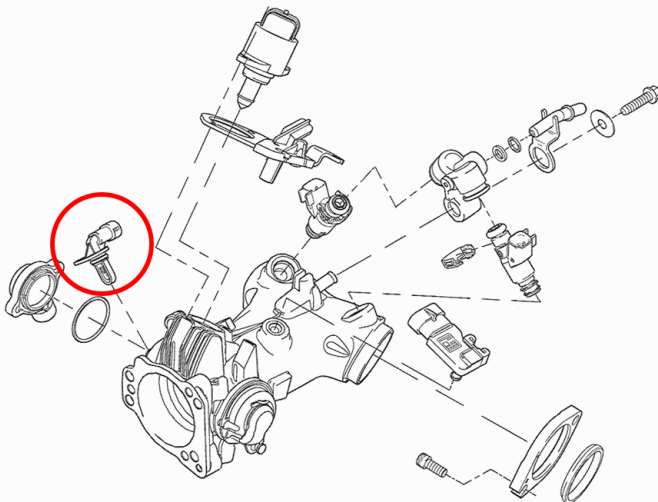

For:

- All models from 2008 and newer.

